




## Professional Speaker

TS-608/TS-610/TS-612/TS-615

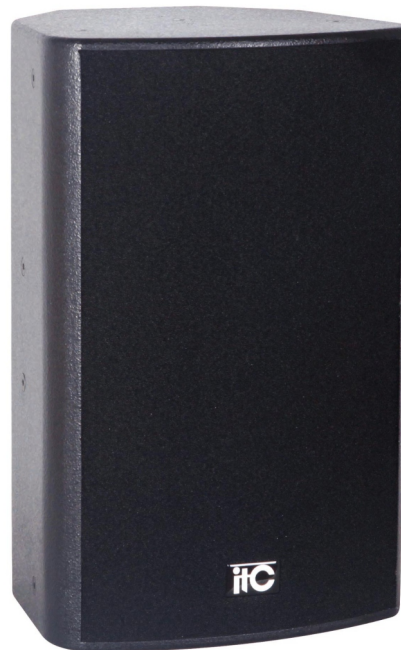

### Description:

It works with the professional amplifiers and audio processors, forming a set of high-end professional sound system with perfect sound effects and outstanding vocal performance. It is applicable to theaters, karaoke rooms, high-end conference rooms, multi-function halls and other places. It can also work with the subwoofer to compose a high-performance satellite box.

### Feature:

- \* Use a mid-woofer unit and a circular polyethylene diaphragm compressed tweeter unit.
- \* 15mm plywood housing, light weight, wear-resistant spray paint processing, and dust-proof net cotton outside.
- \* The frequency divider in precise design is used to optimize the vocal MF performance.
- \* Multiple screw hoisting holes, a pole socket with a diameter of 35mm, various installation methods.

### Specification:

Model	TS-608	TS-610	TS-612	TS-615
Impedance	8Ω	8Ω	8Ω	8Ω
Frequency response	60Hz~20KHz	55Hz~20KHz	50Hz~20KHz	45Hz~20KHz
Rated power	200W	300W	350W	450W
Peak Power	800W	1200W	1400W	1800W
Sensitivity	96dB/W/M	98dB/W/M	99dB/W/M	100dB/W/M
Max SPL(rated/peak)	119dB/126dB	123dB/129dB	124dB/131dB	127dB/133dB
Coverage angle	(H)80° (V)60°	(H)80° (V)60°	(H)80° (V)60°	(H)80°(V)60°
Tweeter	1.4" compressed tweeter × 1	1.4" compressed tweeter × 1	1.7" compressed tweeter × 1	1.73" compressed tweeter × 1
Woofer	8" woofer × 1	10" woofer × 1	12" woofer × 1	15" woofer × 1
Size	440×243×243mm	510×325×300mm	560×360×380mm	660×435×430mm
Weight	9.6Kg	15.2Kg	19.2Kg	25.8Kg