




# Pre-amplifier

## T-2S02

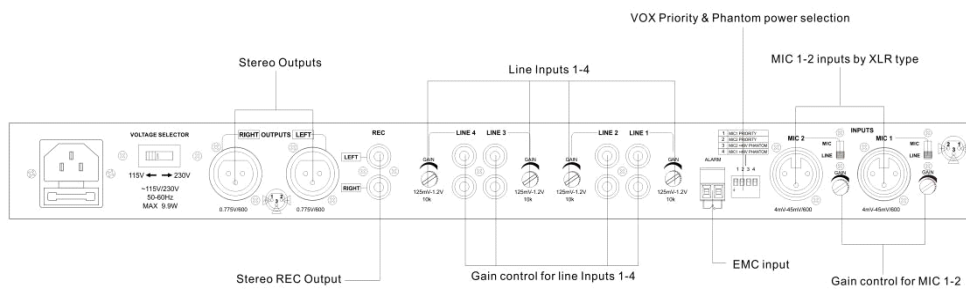

### Feature:

- \* 2 balanced mic inputs by XLR type, phantom power & gain control is separately provided.
- \* 4 unbalanced line inputs by phone jack, gain control is separately provided.
- \* Stereo balanced line outputs by XLR type.
- \* Alarm input & REC unbalanced output.
- \* Input priority level from high to low: Alarm input, Mic1/Mic2 & Line 1-4 inputs.
- \* Bass/treble tone control and volume control for Mic1, Mic2 & source.
- \* Master volume control separately for both left and right channel.
- \* 5 output level meters separately for left and right channel.
- \* Dual AC input voltage selector of 115V and 230V.

### Specifications:

Model	T-2S02
Input	MIC 1-2: 4 mV -45 mV /600Ω, balanced MIC 1-2(LINE): 150mV-1.5V/10KΩ, balanced LINE 1, 2, 3, 4: 250 mV -2.5V/10KΩ, unbalanced
Output	1V/600Ω
Frequency Response	20Hz~20KHz (±1dB)
S/N Ratio	Mic input: 65dB; Line input: 85dB
Tone	Bass: ±10dB at 100Hz, Treble: ±10dB at 10KHz
Phantom Power	+48V
Protection	AC fuse
Power Supply	~110V -230V 50/60Hz
Dimensions	484 x 210 x 44mm
Weight	3.64Kg