

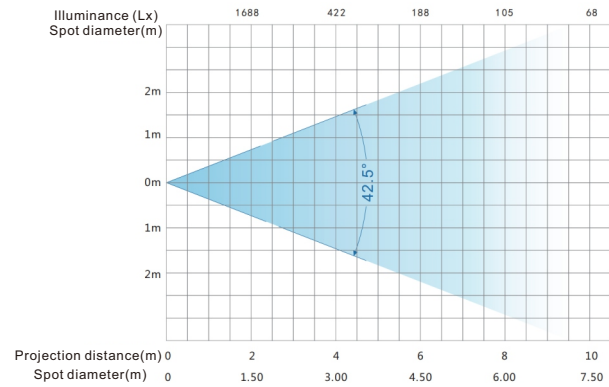


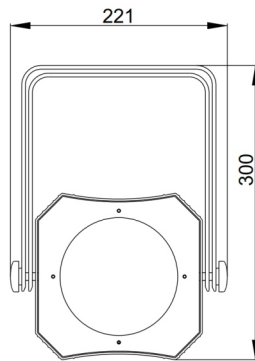

Par Light

TL-SL342



Feature:

- * Strobe: independent electronic strobe 1-25Hz.
- * Color mixing: WW/CW(warm white/cold white) linear color mixing, and built-in macro function.
- * Electronic dimming: 0-100% independent electronic linear dimming, lifelike and flicker-free camera video, the master-slave self-propelled automatic synchronization function, and the console normally controls the self-propelled permanent synchronization.
- * LCD menu: invoke various scenes; the built-in program can be directly invoked and executed.
- * Cast aluminum housing, high luminous efficiency, uniform light mixing, stable performance; equipped with a 1.5m power line and signal line.
- * Fixture connection: three-core signal line IN/OUT and power line IN/OUT.
- * Voice control sensitivity: 65-130dB.
- * Over-temperature protection function: built-in NTC temperature control function. When the LED is overheated, the output power will be intelligently reduced.

Specifications:

| | |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model | TL-SL342 |
| Input voltage | AC 110-240V 50/60Hz, 200W |
| Light source | 200W LED(warm white/cold white) |
| Average lifespan | 50000H |
| Color temperature | 3200K~6500K linear adjustment |
| Beam angle | 60° |
| Control mode | Multiple voice control, DMX512, self-propelled, master-slave connection mode, wireless module function, support RDM protocol and program online update function |
| Channel | 2/6/7CH |
| Fixture material | Cast aluminum housing |
| Protection level | Fireproof V-1, protection IP20 |
| Fixture size (L×W×H) | 260×221×300mm |
| Package size (L×W×H) | 420×285×235mm |
| Gross weight | 4.7kg |
| Net weight | 3.7kg |