




2 Mini Stereo Class-D Amplifier

(Unbalanced inputs + Auto power on/off)

T-221AP

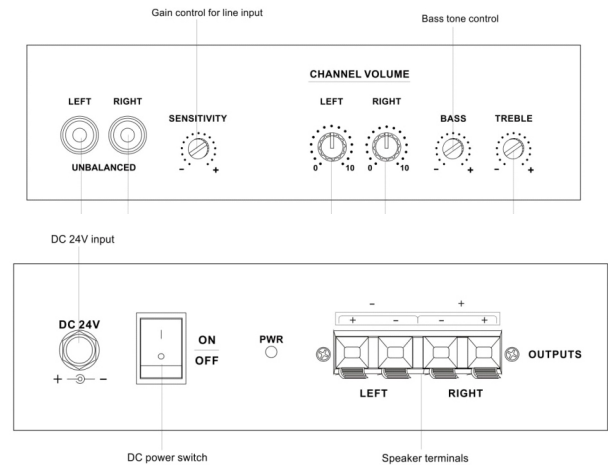

Features:

- * Mini-size Class D amplifier.
- * Stereo output 20 watts by two channels at 4Ω.
- * Wall mounted design with bracket.
- * High efficient about 85%, low heat-generation technology.
- * Environment-protection green technology to save power consumption.
- * Stereo RCA unbalanced line level inputs.
- * Sensitivity control over line inputs.
- * Independent L/R gain control.
- * Independent bass and treble control.
- * Stereo left & right channel outputs.
- * Built-in intelligent limited to eliminate the earth line noise when connected with laptop and iphone.
- * Automatic power on when input signal is detected.
- * Automatic power off when no inputs for 5 minutes.
- * Output will be delayed after fully power on.
- * Convenient push terminal speaker outputs.
- * Overload, high temp and short-circuit protection.
- * DC 24V power adapter is included.

Specifications:

Model	T-221AP
Rated Power Output	2 x 20W (THD10% @ 4Ω1KHz)
Output Impedance	4Ω or 8Ω
Line Input Sensitivity	200mV-2V/10KΩ
Frequency Response	50Hz~18KHz (±2dB)
S/N Ratio	85dB
THD	≤0.5% at 1KHz, 1/3 rated power
Efficiency	≤85%
Controls	Power, input sensitivity, gain control, bass & treble
Indicators	Power
Protection	Overload, high temp and short-circuit
Power Supply	DC 24V, power adapter is supplied compatible of 110V-230V
Dimensions	230 x 115 x 57mm
Finish	Panel: steel, black ; Case: SPCC Panel