



SMART MEETING

MAKE YOUR COMMUNICATION EASIER



TS-0300M Series

Digital Conference System

System Features >>>

④ Perfect Audio Transmission

Lossless sound quality with 48K sampling rate and 5ms ultra-low latency.

④ Wide Wireless Coverage

The number of wireless APs could increase by connecting to a POE network switch.

④ Speech-to-text

Support speech-to-text of wired and wireless unit simultaneously

④ Automatic Camera tracking

The system could automatically switch the camera to track the speaker.

④ Simultaneous interpretation

Support multiple languages switching and simultaneous interpretation in maximum 64 languages.

④ Fire alarm

The alarm goes off immediately to urge people to evacuate the venue when encountering emergency.

System Features

Perfect Audio Transmission
Wide Wireless Coverage
Speech-to-text
Automatic Camera tracking
Simultaneous interpretation
Fire alarm





TS-0300M New Conference System Controller

- * A maximum of 63+1 channels wired simultaneous interpretation.
- * Hand-in-hand cable connection, easy for installation and maintain.
- * Powerful 16-channel output function with three modes: role separation, simultaneous transmission and phase control output mode.
- * With USB recording function, it can record and play meeting records.
- * It controls audio matrix settings, 16-channel grouping output mode switching, microphone switching, and role separation controller through WEB.
- * Both 16 multi-function output and 2 LINE OUT have 10-band EQ adjustment function.



TS-8611 New Conference System Server

- * Supports real-time transcribing of received voice into text in a secure offline scene; Audio file with formats including mp3\wav\wma\mp4\avi could be uploaded to transcribe into text.
- * High transcribing accuracy with Mandarin up to 98%, Cantonese transcribing rate ≥90%
- * Speech transcribing speed ≤ 200 milliseconds, enabling 1 hour of audio recognition within 5-10 minutes.
- * The server can tell the conversation scene from the received audio and provide intelligent pause and punctuation advice.



TS-0305/ TS-0305A New Conference System Chairman/ Delegate Unit

- * 4.3-inch IPS full-color touch screen with a simple interface.
- * Adopts 100M network transmission. And the network connection adopts network cable hand in hand, which is convenient for wiring.
- * Perfect sound quality with a bandwidth of 80Hz-16KHz and sampling rate up to 48K.
- * Communication adopts standard TCP/IP protocol, and each unit can support ping packet function.
- * With two 3.5mm headphone jacks, you can listen to the sound of any one of 63+1 channels.

TS-W301/ TS-W301A Wireless Conference System Chairman/ Delegate Unit


- * 4.3-inch capacitive touch screen and 48KHz sampling rate.
- * With the function of intelligent detection of faults, it prompts the user for AP failure, host communication failure, weak signal etc.
- * Advanced processing chip architecture, and unique processing algorithms, microphone boot connection time is only 5 seconds.
- * 128-bit AES encryption and WPA/WPA2 wireless security technology help prevent eavesdropping and unauthorized access.
- * With voice control, the microphone can be turned on intelligently. You can adjust voice sensitivity and set the off time by the PC software.



Related Products



16-zone phase control >>>

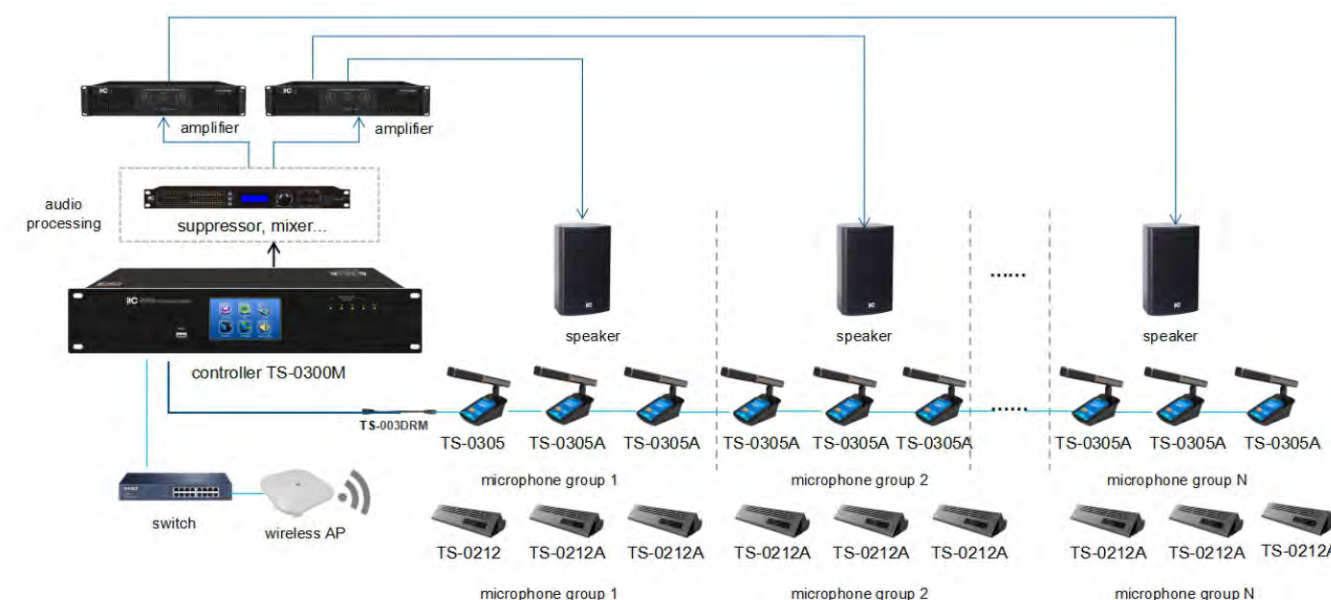

Speech-to-text >>>

