



System introduction <<<



The design of stage lighting system is configured according to the rules of stage art performance and special use requirement. The purpose is to design and configure the lighting system required for various art performance, so that the stage lighting system can precisely, completely show the art.



To create a complete free space of stage lighting, adapt to all lighting requirements; in order to enable the system to continue to operate, properly increase reserves and expand space.




Guangzhou BaoLun Electronics Co., Ltd (Leading Audiovisual and Lighting System Manufacturer)
Factory Add: No. 1, Shilonggang Road, Dalong Street, Shiji Town, Panyu District, Guangzhou City, Guangdong Province
Headquarter Add: Building No.A13-1 Yiku Industrial Park, The Hills, Dongyi Road, Panyu District, Guangzhou China 511492
Website: www.itctech.com.cn info@itc-pa.com.cn

www.itctech.com.cn

LED Studio Light >>>

TL-SL303

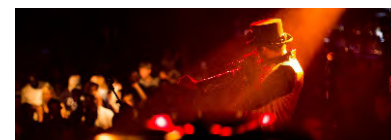

Product Specification	
Model	TL-SL303
Input voltage	AC 110-240V 50/60Hz, 200W
Light source	522 5050/0.4W four-in-one LED
Average lifespan	100000H
Color temperature	2700-6500K, CRI≥80, TLCI≥80
Channel	4/8/9 channels
Control mode	DMX signal control or manual button control; color temperature can be manually adjusted separately
Fixture material	Aluminum alloy
Protection level	IP20
Fixture size (L×W×H)	559×354×155mm
Package size (L×W×H)	640×390×215mm
Gross weight	12kg
Net weight	10.2kg

LED Studio Light >>>

TL-SL323



Product Specification	
Model	TL-SL323
Input voltage	AC 110-240V 50/60Hz, 200W
Light source	COB white light 200W LED 3200K
Average lifespan	50000H
Color temperature	3200K
Beam angle	19° (26° optional)
Control mode	LCD screen
Signal input/output	3P-XLR input/output, DMX512 signal
Channel	2CH
Fixture material	Die-casting aluminum
Protection level	IP20
Fixture size (L×W×H)	628×328×183mm
Package size (L×W×H)	710×415×275mm
Gross weight	11.5kg
Net weight	9.5kg

LIGHT THE WORLD
ILLUMINATE THE FUTURE

STAGELIGHTING

Illuminate you , enjoy the stage

Product Description

Moving Head Beam Light
LED PAR Light
LED Water Wave Light
LED Flat Soft Light
LED Focus Imaging Light
Lighting Console



info@itc-pa.com.cn

www.itctech.com.cn

Related Products <<<



TL-SL201



TL-SL343



TL-SL205



TL-SL101B



TL-SL102



TL-SL112B



TL-SL361



TL-SL307



TL-SL304



TL-SL327



TL-XGC0-04



TL-SL391



TL-LT703



TL-SL611



TL-SL703

Par Light >>>

TL-SL201



Product Specification	
Model	TL-SL201
Input voltage	AC 110-240V 50/60Hz, 165W
Light source	54×3W LED(R14G14B14W12)
Average lifespan	50000H
Color temperature	3200K~7200K linear adjustment
Beam angle	25°(15°, 45° optional)
Control mode	Multiple voice control, DMX512, built-in self-propelled program, master-slave online mode, support RDM protocol and program online update function
Channel	4/8 channels
Fixture material	Cast aluminum housing
Protection level	Fireproof V-1, protection IP20
Fixture size (L×W×H)	287×215×330mm
Package size (L×W×H)	250×250×360mm
Gross weight	3.7kg
Net weight	3.2kg

Moving Head Beam Light <<<

TL-SL101B



Product Specification	
Model	TL-SL101B
Input voltage	AC110V-240V 50/60Hz, 350W
Ballast	Electronic ballast
Light source	OSRAM 231W
Average lifespan	2000H
Color temperature	8500K
Beam angle	0~3.8°(parallel beam angle)
Control mode	DMX512 (ART-NET/RDM/DMX wireless, optional)
Channel	16 channels
Fixture material	High temperature resistant plastic + molded alloy material
Protection level	IP20
Fixture size (L×W×H)	409×310×498mm
Package size (L×W×H)	452×405×540mm
Gross weight	19kg
Net weight	16.5kg

Water Effect Light <<<

TL-LT103



Product Specification	
Model	TL-LT103
Input voltage	AC 110-240V 50/60Hz, 120W
Light source	3 OSRAM 40W (RGBW) red, green, blue and white LED
Average lifespan	50000H
Color temperature	7500K
Beam angle	22.5°
Control mode	Comply with the international standard DMX512 signal control protocol, 3-core (5-core optional) DMX512 signal interface; master-slave synchronous control mode, support RDM protocol and program online update function
Operation mode	DMX mode, user program mode, built-in program mode
Channel	5/9 channels
Fixture material	High-strength extruded aluminum + die-cast aluminum alloy end cover
Protection level	Protection IP67
Working temperature	-20℃~45℃
Fixture size (L×W×H)	1000×140×174mm
Package size (L×W×H)	1075×250×255mm
Gross weight	9.4kg
Net weight	5.5kg