



Wall Mount Speaker


VA-774H/VA-775H/VA-776H

VA-774HW/VA-775HW/VA-776HW



VA-774H/VA-775H/VA-776H

VA-774HW/VA-775HW/VA-776HW

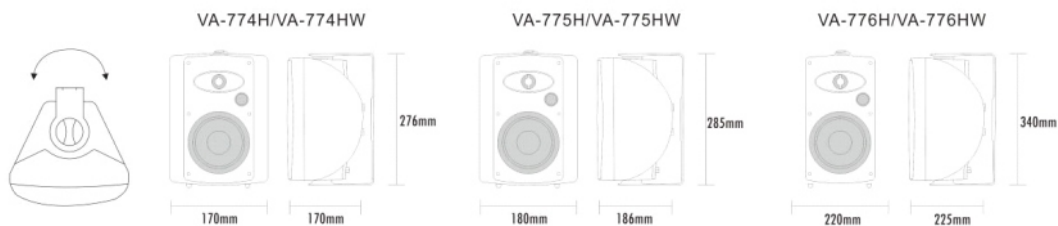

Descriptions:

* Material: plastic

* Features: Indoor high-grade wall mount speaker, multi-power constant resistance constant pressure choice, modern arc design, 2 frequency division design, cost-effective, easy to install. Applicable to hotels, conference halls, etc. voice message.

* EN54-24 certification is under taken.

Specifications:

Model	VA-774H/VA-774HW	VA-775H/VA-775HW	VA-776H/VA-776HW
Power Taps @100V	2.5W, 5W, 10W, 20W	3.75W, 7.5W, 15W, 30W	5W, 10W, 20W, 40W
Power Taps @70V	1.25W, 2.5W, 5W, 10W, 20W	1.9W, 3.75W, 7.5W, 15W, 30W	2.5W, 5W, 10W, 20W, 40W
Max output	40W	60W	80W
Transformer Impedance	4KΩ/2KΩ/1KΩ/500Ω/250Ω	2.6KΩ/1.3KΩ/670Ω/330Ω/165Ω	2KΩ/1KΩ/500Ω/250Ω/125Ω
Input	70V/100V/8Ω	70V/100V/8Ω	70V/100V/8Ω
SPL(1W/1M)	86dB	88dB	89dB
Max. SPL (Rated W/1M)	99dB	103dB	105dB
Frequency Response (-10dB)	120-18KHz	100-18KHz	100-20KHz
Finish	Baffle: ABS, Black/White Grille: Steel, Black/White	Baffle: ABS, Black/White Grille: Steel, Black/White	Baffle: ABS, Black/White Grille: Steel, Black/White
Speaker Driver	4" x 1 1.5" x 1	5" x 1 1.5" x 1	6" x 1 1.5" x 1
Dimension	276 x 170 x 170mm	285 x 180 x 186mm	340 x 220 x 225mm
Weight	2.3kg	2.7kg	4.1kg
Mounting	With mounting bracket fixed by screw	With mounting bracket fixed by screw	With mounting bracket fixed by screw