



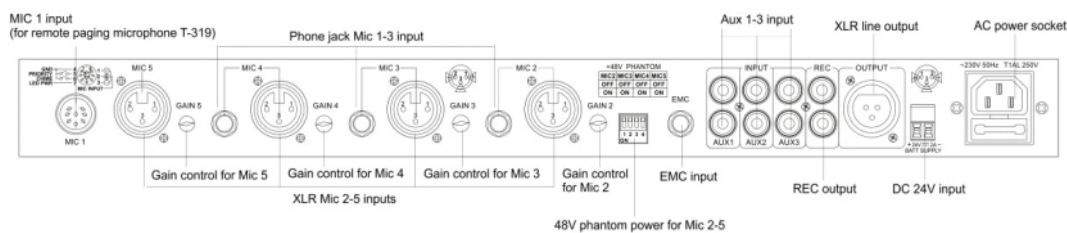

Pre-amplifier

TF-01S22

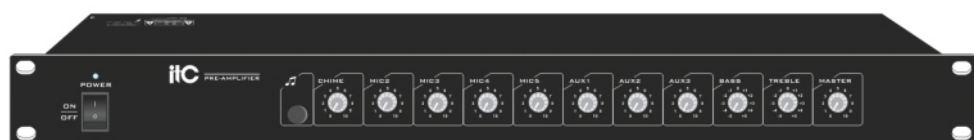

Description:

The T-1S01 pre-amplifier with multiple balanced and unbalanced microphone input options and single channel output.

Feature:

- * Standard cabinet design (1U).
- * 5-channel MIC input , 3-channel Aux input and 1-channel EMC input.
- * Independent volume control, MASTER volume control.
- * MIC balance input interface with phantom power.
- * Individual Gain control for MIC.
- * EMC has priority over all inputs except MIC 2.
- * Bass and Treble Tone Control.
- * It can be used with T-319.

Specifications:

Model	TF-01S22
Input	MIC 1, 2, 3, 4, 5: 5mV/600Ω Balanced AUX 1, 2, 3: 10KΩ/200mV, Unbalanced
Output	600Ω/1V/0dBV
Frequency Response	20Hz~20KHz (±1dB)
S/N Ratio	MIC input: 80dB AUX input: 85dB
Tone	Bass: ±10dB at 100Hz Treble: ±10dB at 10KHz
Power Supply	~110V-230V 50/60Hz
Dimensions	484 x 298 x 44mm
Weight	4.22Kg