




# Speaker Line Supervision

## TF-42252

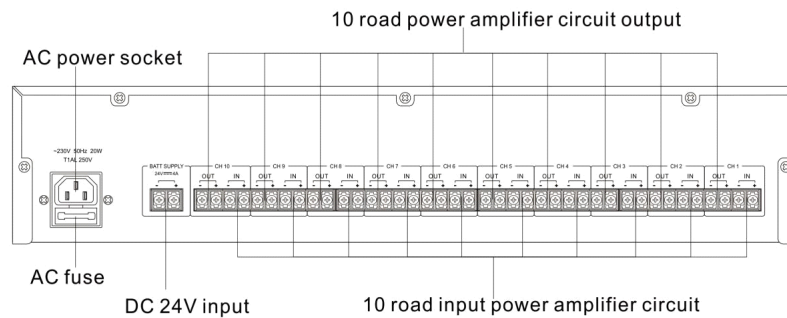

### Description:

This is a equipment for detecting linear impedance (power), linear open circuit and linear overload of horn.

### Features:

- \* Rack mounted design in 2U height.
- \* Adopt 192×64 pixel matrix LCD display and working status indicator.
- \* LCD English display and 1-10 channel status indicator.
- \* Detection over speaker line impedance, open circuit, short circuit and overloading.
- \* Timely detect speaker loop line.
- \* Speaker line detection no interrupt with music broadcasting or paging.
- \* Indications include indicator color change and buzzer alarm when speaker line impedance has been changed.
- \* Each channel detection Max. 2000W speaker loading.
- \* LCD real time display speaker line's status and power.
- \* Suitable for 100V and 70V line speaker system.
- \* Ten channel inputs and outputs.
- \* AC110V or 230V and DC 24V DC operation.
- \* Pre-setting memory function even in case of power off.

### Specifications:

Model	TF-42252
Power Supply	~110V-230V 50/60Hz & DC 24V
Power Consumption	20W
Dimension	484 x 303 x 88mm
Weight	5.36Kg