




# Digital Conference System Extension Controller

## TS-6221M

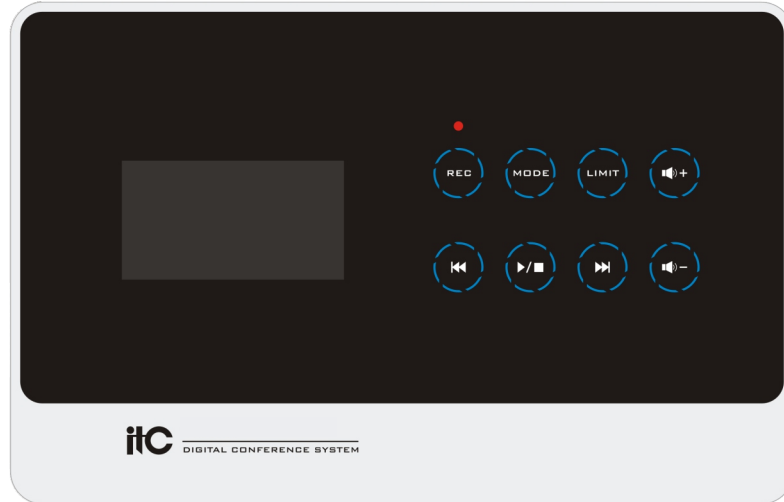

### Feature:

- \* Smart touch buttons, easy operation. With recording, playback control, conference mode, quantity switch and volume control buttons.
- \* With 4 meeting modes: FFIO, NORMAL, FREE, APPLY.
- \* Spokesman quantity limitation: adjustable options for 1, 2, 4, 6. Chairman is not limited.
- \* Support Max 30 pieces microphone units.
- \* Hand in hand cable connection way, easy for installation and maintenance.
- \* Adopt digital equalization module and noise reduction processing module for audio processing, to ensure clear and good sound quality. With 1 channel audio input and 1 channel audio output.
- \* With 1 group original audio channel output, connect with amplifier.
- \* With 1 group recording channel output, connect with external recording device.
- \* Built-in recording function and SD interface, can record meeting conversation. Deliver with one 8G SD card for recording use.
- \* Can connect external mic, gain is adjustable.
- \* With 48V Phantom power, connect with external mic, gain is adjustable.
- \* Support 24V DC power supply, for the controller and mic units.
- \* Control unit shell adopt metallic material, both shell and cables has the connection with ground line, to ensure the function of antistatic 6000V.
- \* Delicate desktop design, easy for operation.
- \* With 3.5mm headphone jack monitoring meeting conversation.

### Specifications:

Model	TS-6221M
Microphone Quantity	≤30
Frequency Response	30Hz~20KHz
SNR	>75 dB(A)
Dynamic Range	>80 dB
Crosstalk	>80 dB
THD	<0.05%
Power Supply	24V DC
Audio Input	LINE IN : 350mV Balance
Audio Output	LINE OUT 1: 1V Balance
Output Load	>1KΩ
Static Consumption	10W
Output Consumption	70W
Connector	8 PIN aviation plug
Standards	IEC60914
Working Temperature	-10°C~+60°C
Working Humidity	20%~80% relative humidity, no condensation
Color	Black
Dimension(L×W×H)	210x132x50 mm
Weight	1.65kg