




# IP Network Adapter (Wall Mount Type with 2x10W Amplifier)

## T-6705A

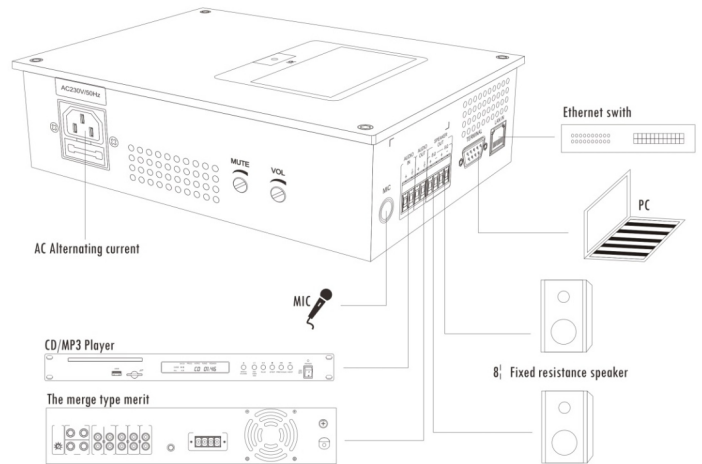

### Descriptions

Apply to ordinary classrooms, multimedia classrooms, offices, meeting rooms and other places of broadcast and local broadcast.

### Features

- \* Standard wall-mounted design, black brushed aluminum panels, exquisite appearance, sophisticated technology, filling high-grade temperament.
- \* 3.4 inch industrial grade dot matrix display, display information on-demand catalogs and the current task, with infrared remote control, to achieve on-demand content to any server program library, you can control play / pause, fast forward / rewind, AB repeat, flexible and easy to operate.
- \* Equipment with embedded computer technology and DSP audio processing technology design; high-speed industrial-grade chips, start-up time of less than 1 second.
- \* Built-in single network hardware audio decoding module, support TCP/IP, UDP, IGMP (multicast) protocol, transmit 16-bit audio signal as same as CD quality through network transmission.
- \* Built-in 2 x 15W impedance output amplifier module, sound fine, strong power.
- \* 1 channel audio signal auxiliary output interface, scalable external power amplifier.
- \* 1-local microphone input, a line input, you can adjust the volume, to achieve local PA.
- \* Built-in audio processing circuitry to support multi-channel signal amplification, mixing, support three class audio priority management.
- \* Support remote media-on-demand capabilities, on-demand programming support English coach playback mode (AB repeat).
- \* Support 1000 classes audio priority mute control.
- \* Support PSTN phone broadcasting, support SMS voice broadcast.
- \* Support mobile WIFI on demand, wireless remote control on demand.
- \* Support panel serial port expansion on demand, to achieve remote programming on demand, program selections, adjust the volume.
- \* Support server management functions authorized to operate a unified, unified configuration management user and password.
- \* Support digital audio playback breakpoint passage of time, to ensure that the broadcast synchronization effect.
- \* Support DHCP, compatible routers, switches, bridges, gateways, modem, internet, 2G, 3G, 4G, multicast, unicast and other random network structure.
- \* Imitation iOS tiled menu management, elimination of complex secondary menu.
- \* Support the new configuration registered intelligent voice prompts.
- \* Support ESD protection, built-in network isolation mine processing circuit.
- \* 1 channel to download the PC serial port IP address, is used to modify the IP address of network decoding module.
- \* Digital products, expansion of convenience, without geographical restrictions, no additional room management equipment, total net free line construction design, easy to install.

### Specifications:

Model	T-6705A
Network Input	Standard RJ45
Communication Protocol	TCP/IP, UDP, IGMP(multicast)
Transmission Speed	100Mbps
Audio Mode	16-bit CD sound quality
Frequency Output	80Hz~16KHz
T.H.D	≤1%
S/N Ratio	>75dB
External Speaker Output Impedance and Power	2 x 15W industrial standard press-line connecting terminals
Aux line input level	350mV, industrial standard press-line connecting terminals
Line output level	1000mV, industry standard press-line connecting terminals
Line output impedance	470Ω
MIC Input Sensitivity	5mV
Working Temp	5°C~40°C
Humidity	20%~80% Relative humidity, without condensation
Power Consumption	≤50W
Power Supply	~220-240V 50/60Hz
Dimensions	187 x 139 x 60mm
Weight	1.62Kg