




LED Corner Light

TL-LH5402

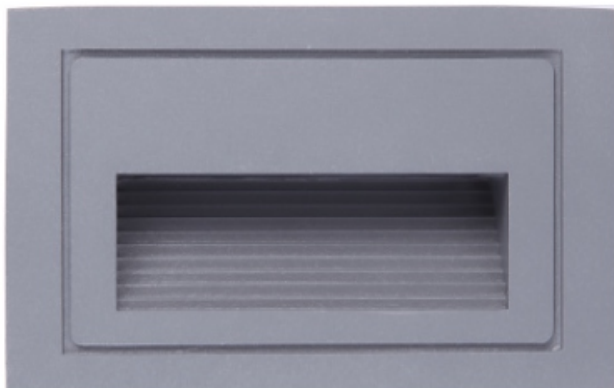

Description

It is suggested to be installed 0.3M away from the ground indoor, which is convenient for night activities, such as going to the bathroom. Since ordinary lights at night will affect the rest of others, corner lights are installed in hospital wards generally, and they are also suitable for squares, gardens, street and other lighting places.

Features

- * Original antique appearance design, simple overall appearance, blended with the building itself;
- * Waterproof, dustproof and corrosion resistant;
- * ADC13 die-casting aluminum, resin potting, good heat dissipation of aluminum.

Specifications

Input voltage/power	DC24V/2W
Light source	EPISTAR
Color temperature	3000K(1900K、 2100K、 4000K、 5700K optional)
Light effect	≥40lm/W
Color rendering index	Ra≥70
Color tolerance	SDCM≤5
Light source life	50000H
Control mode	ON/OFF
IK level	IK08
IP level	IP54
Shell material	Aluminum
Appearance color	sand gray
Installation method	Embedded
Product Size	105*60*55mm