




Professional column speaker

KS-206A

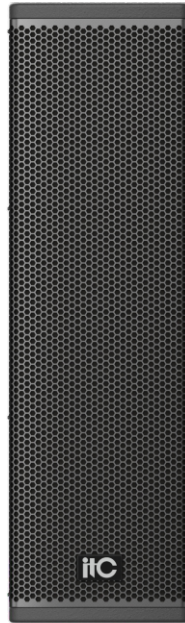

Description

Built-in two-way professional sound column, 6.5-inch large-diameter woofer, wide dynamic range, 1-inch treble compression driver loaded with waveguide, concentrated directivity; carefully debugged crossover network, vocals stand out and have high degree of restoration. Suitable for use in conference rooms, banquet halls, lecture halls, command centers, and multi-function halls.

Feature

- * Uses two 6.5-inch specially customized high-efficiency speaker units and one 1-inch tweeter unit;
- * The cabinet is made of 15mm plywood, and the surface is sprayed with environmentally friendly water-based wear-resistant and flame-retardant paint;
- * Design and install a tweeter unit loaded with waveguide, which has good directivity, concentrated sound field and beautiful sound quality;
- * Flexible installation system, multi-angle adjustment of sound field coverage, suitable for use in various occasions;
- * Professional speaker sockets and plugs with good electrical characteristics.

Specification

Type	Built-in two-way professional column sound
Rated power	300W
Peak power	1200W
Nominal impedance	4Ω
Frequency range (-10dB)	90HZ-20KHZ
Sensitivity(±3dB)	97dB (1M/1W)
Maximum SPL (rated/peak)	122dB/128dB
Subwoofer	6.5" bass × 2
Tweeter	1" compression tweeter × 1
Coverage angle (-6dB)	90° (H) 80° (V)
Net weight	11.6kg
Dimensions (H×W×D)	530×206×244(mm)