
T-750F



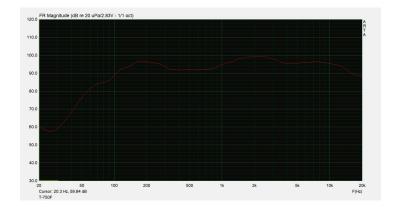

Feature

- * Indoor wall-mounted speaker with unique shape design, streamlined appearance, plastic and metal mesh structure.
- * Equipped with a 5-inch woofer and a 1.5-inch tweeter, the sound radiation angle is large, the low frequency is full, and the sound quality is clear.
- $^{\star}\, \text{The built-in high-performance audio transformer can reduce the loss caused by impedance in the circuit.}$
- * The mesh cover adopts the technology of sticking breathable cotton inside, which can prevent dust or liquid from entering and affect the sound quality, protect the speaker and increase the service life
- * The bracket design can be adjusted up, down, left and right, and the up and down angles can be flexibly adjusted to facilitate user operation and installation.
- * Suitable for schools, hotels, hotels, corridors, supermarkets, etc.

Specification

Rated power (100V)	20W , 10W
Rated power (70V)	10W , 5W
Sensitivity	97dB ±3dB
Max SPL	110dB ±3dB
Impedance	Black: COM Green: 500Ω White: 1KΩ
Frequency response	80Hz-20kHz
Speaker unit	5"×1
Dimension	Ф170×187mm
Weight	1.54kg