



**Flush Mounted Box
T-7718**



Hole size(LxWxD):126x75x31 mm

**Surface Mounted Box
T-7719**



Description

It is widely applied to indoor and outdoor environments' communications, anti-explosion and waterproof. With a key to call back to the control center.

Features


- * With Rectangular embedded design, simple and smooth appearance, sophisticated finish, and durable quality.
- * With embedded industrial-grade dual-core processing chip (ARM + DSP),to ensure start-up time less than 1S.
- * One key ask for help calling to the duty room to achieve quick connection, and easy operation.
- * Built-in high sensitivity microphone, with wide area for sound collection, and high sound reproduction.
- * Built-in 3W full-range monitor speaker, with loud and clear voice.
- * Support hands-free calling and broadcast receiving.
- * Support local electronic door lock and local alarm indicator (select 1 from 2 options).
- * Support local access to short-circuit signal.
- * With DC power supply interface, to connect external 24V adapter.
- * Two installation methods: embedded and surface mounted installation.
- * Protection class: IP55.

Specifications


Model	T-7703
Network Interface	Standard RJ45 input
Transmission Rate	100Mbps
Support Protocol	TCP/IP,UDP,IGMP (Multicast)
Audio Type	MP3
Audio Mode	16 bit CD quality
Sampling Rate	8K~48KHz
MIC Input Sensitivity	10mV
Frequency Response	317Hz~3.4KHz
Overall Power Consumption	10W
THD	≤ 1%
SNR	> 65dB
Operation Temperature	-20℃~60℃
Operation Humidity	20%~80% Relative humidity, non-condensing
Protection Class	IP55
Input Power	~190-240V 50/60Hz (The power adapter); DC24V/1A
Dimension	132×81×39mm
Weight	0.5Kg

Connections

Equipped with hidden way

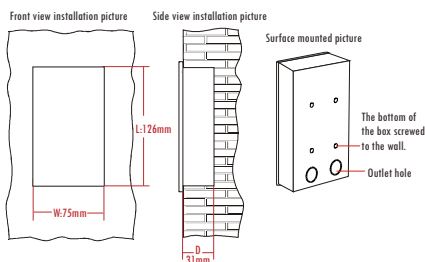

With the way

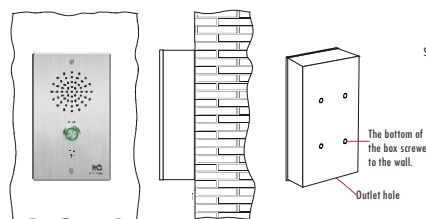

Connection mode

