




Active Professional Speaker

TS-610P/TS-612P/TS-615P

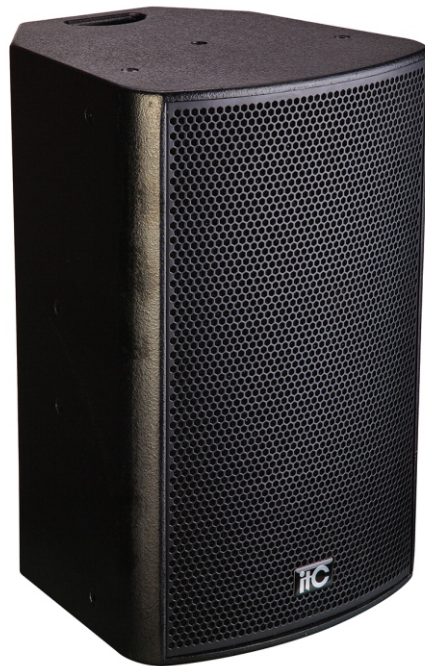

* Work With, pre-effect processor together, formed a set of perfect sound, vocal performance outstanding ,high-end entertainment meeting sound-reinforcement system, suitable for luxury meeting rooms and multi-function hall and other places for use.

*Adopt 1x mid-bass unit and 1x Circular polyethylene diaphragm compressive tweeter unit.

*The box is made of 15mm birch, light weight, The surface is treated with high-grade transparent paint, and with Anti-dust mesh cotton.

*Frequency divider in precise design is used to optimize power response and MF vocal performance.

*The full range is equipped with high efficiency power amplifier module, work with powerful DSP audio processor, can set a comprehensive parameter according to different applications of the system. And equipped with 6 parameter equalization, with frequency, delay, limiting function.

*Multiple screw installing holes, a 35 mm diameter plunger socket, a variety of installation methods.

Model	TS-610P	TS-612P	TS-615P
Impedance	8Ω	8Ω	8Ω
Frequency Response	55Hz-20KHz	50Hz-20KHz	45Hz-20KHz
Rated Power	300W	350W	450W
Peak Power	1000W	1400W	1800W
Sensitivity	98dB/W/M	99dB/W/M	100dB/W/M
Max SPL(Rated/Peak)	123dB/128dB	124dB/130dB	127dB/133dB
Cover Angle	(H)80°(V)60°	(H)80°(V)60°	(H)80°(V)60°
Tweeter	1.4" Compressed tweeter×1	1.7" Compressed tweeter×1	1.73" Compressed tweeter×1
Bass	10"bass×1	12"bass×1	15"bass×1
Dimension (H×W×L)	510×325×300 mm	560×360×380 mm	660×435×430mm
Weight	18.5Kg	21.8Kg	28.8Kg
Working Power Supply	AC 220V 50Hz	AC 220V 50Hz	AC 220V 50Hz
Power Consumption	240W	280W	360W