




# Column Speaker

## TS-1203C

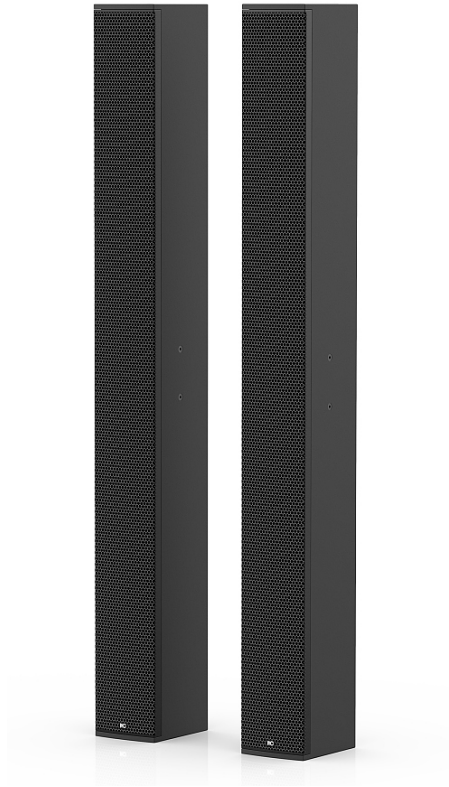

### Feature:

- \* Adopt twelve 3-inch full range speaker units.
- \* The housing adopts 12mm high-quality high-density board, precise CNC processing, wear-resistant spray paint treatment.
- \* Accurately designed speaker frequency response can optimize the high fidelity reduction of the human voice.
- \* Spliced array design achieves a wider sound field coverage with fewer speakers.
- \* Applicable to large multi-function halls, theaters, gymnasiums, outdoor performances, etc.

### Specification:

Model	TS-1203C
Rated power	400W
Peak power	1600W
Max SPL (rated/peak)	124dB/130dB
Nominal impedance	6Ω
Frequency range	60Hz-20kHz
Sensitivity	98dB(1M/1W)
Speaker	3"×12
Net weight	20.24kg
Horizontal coverage angle (°)	110
Vertical coverage angle (°)	100
Size	1500×150×195mm (H×W×D)