



# Ceiling Speaker (Coaxial Speaker)


## T-205A/T-206A/T-208A



T-205A

T-206A

T-208A

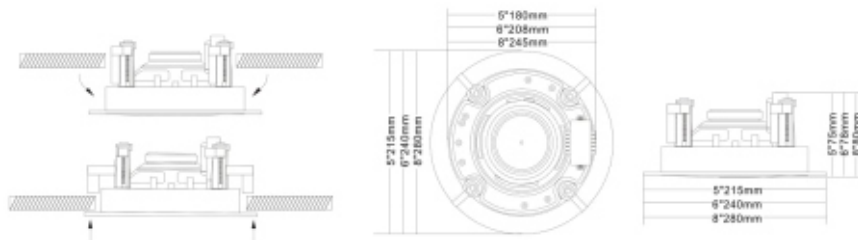

### Description:

Indoor high-grade ceiling speakers, plastic flame retardant unit to protect the back cover. With air vent design, make the sound perfectly reproduce. Applicable to hotel, clubs, etc

### Specifications:

Model	T-205A	T-206A	T-208A
Power taps @100V	1.25W, 2.5W, 5W, 10W	2.5W, 5W, 10W, 20W	3.75W, 7.5W, 15W, 30W
Power taps @70V	0.65W, 1.25W, 2.5W, 5W	1.25W, 2.5W, 5W, 10W	1.87W, 3.75W, 7.5W, 15W
Impedance	Black: Com Blue: 8KΩ Red: 4KΩ Green: 2KΩ White: 1KΩ	Black: Com Blue: 4KΩ Red: 2KΩ Green: 1KΩ White: 500Ω	Black: Com Blue: 2.6KΩ Red: 1.3KΩ Green: 670Ω White: 330Ω
SPL(1W/1M)	89dB	92dB	94dB
Max. SPL (Rated W/1M)	99dB	105dB	109dB
Frequency response (-10dB)	80-20KHz	70-20KHz	60-20KHz
Finish	Baffle: ABS, White Grille: Steel, White	Baffle: ABS, White Grille: Steel, White	Baffle: ABS, White Grille: Steel, White
Speaker driver	5" x 1 1.5" x 1	6" x 1 1.5" x 1	8" x 1 1.5" x 1
Cutout size	180mm	208mm	245mm
Dimensions	215 x 75mm	240 x 78mm	280 x 80mm
Weight	0.8Kg	1.2Kg	1.6Kg
Mounting	Flush-mount dog ears	Flush-mount dog ears	Flush-mount dog ears