




KS-12

Professional Speaker

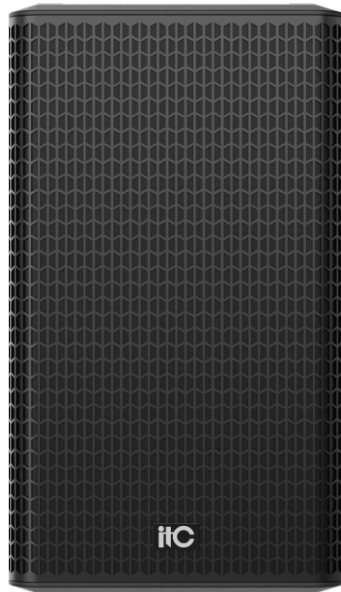

Description

It is suitable for various sports venues, theater theaters, auditorium classrooms, banquet halls, outdoor performances, multi-functional halls and various high-end application places.

Feature

- * Adopt a 12-inch woofer and a 1.4-inch high-frequency compression tweeter.
- * The cabinet adopts 15mm birch board CNC cutting technology, the internal multi-point reinforcement ribs are fixed to increase the stability of the cabinet, and the surface is treated with spraying water-based paint, which is strong and wear-resistant.
- * One-piece stamping and forming rigid protective mesh grille, with acoustic high sound-transmitting cotton mesh, to protect the speaker and increase the service life.
- * The two-way frequency-dividing rear-guiding type and special horn design reduce off-axis sound interference, using high-quality filter components and excellent passive filter technology and phase correction technology, the speaker can provide transparent and bright treble, round and clear alto, and full and flexible bass.
- * Multiple installation holes are reserved in the cabinet to achieve flexible installation methods. Professional speaker sockets and plugs with good electrical characteristics.

Specification

Model	KS-12
Type	Full range speaker
Rated power	400W
Peak power	1600W
Nominal impedance	8Ω
Frequency range(-10dB)	50HZ-20KHZ
Sensitivity(±3dB)	99dB (1M/1W)
Maximum SPL (rated/peak)	125dB/131dB
Woofer	12" woofer × 2
Tweeter	1.4" Compression tweeter x 1
Coverage angle (-6dB)	90° (H) 70° (V)
Net weight	23.3kg
Dimension (H×W×D)	650×370×380(mm)