




# Water Effect Light

## TL-LT102

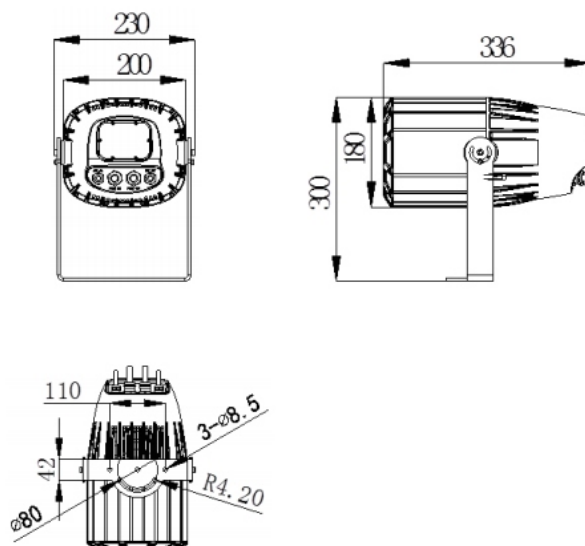

### Feature:

- \* Color: one 5+1 fixed color wheel, two-way stepless rotation, magnet positioning, color index, half-color and other functions.
- \* Function: 2 water gobo wheels, independent rotation, two-way stepless rotation.
- \* Electric focusing, the spot can show various water ripple effects with the focal length changing.
- \* Dimming: 0-100% linear adjustment.
- \* Strobe: electronic strobe, 0-25 times/sec (built-in pulse stroboscopic effect).
- \* DMX512 port program update, convenient and fast software update via DMX data cable.
- \* Over-temperature protection function: built-in NTC temperature control function; when the LED is overheated, the output power will be intelligently reduced.
- \* LCD blue screen display. The lamp usage time, software version number and others are displayed.

### Specifications:

Model	TL-LT102
Input voltage	AC 110-240V 50/60Hz, 240W
Light source	One 200W white light LED OSRAM chip
Average lifespan	50000H
Color temperature	7500K
Light spot angle	45° (15°, 30°, 60°, 70° optional)
Control mode	Comply with the international standard DMX512 signal control protocol, 3-core (5-core optional) DMX512 signal interface; master-slave synchronous control mode, support RDM protocol and program online update function
Operation mode	DMX mode, user program mode, built-in program mode
Channel	7 channels
Fixture material	High-strength die-cast aluminum alloy + copper tube radiator + 1 waterproof fan to assist heat dissipation
Protection class	IP67
Working temperature	-20°C~45°C
Fixture size (L×W×H)	230×180×367mm
Package size (L×W×H)	270×250×455mm
Gross weight	7.9kg
Net weight	7.0kg